

TECH DATA

MastaMate Paper Tape is a spark perforated paper tape designed to reinforce recessed edges and butt joints for plasterboard systems. MastaMate Paper Tape can be used for hand or mechanical tool application.

MastaMate Paper Tape is tested and approved for Knauf systems. For the strongest joint Knauf recommends using MastaMate Paper Tape with either MastaBase, MastaLongset or MastaTape for first and second coats, with a final coat of any Knauf finishing or all purpose compound.



Performance

Strength

Made from special paper providing greater tensile strength to prevent tearing, wrinkling or stretching. Provides a strong joint.

Bonding

Machine roughened paper for superior bond generation.

Ease of use

Precision made centre crease for easy application.

Efficient

Can be used with mechanical tools for fast and efficient tape application.

Compatible

Compatible with all Knauf jointing, bedding and taping compounds.

Benefits

- > Machine roughened for superior bonding
- > Centre creased for easy application
- > Spark perforated to prevent blistering

Product Information


SIZE	76 m roll , 153 m roll		
PERFORATION TYPE	Spark perforated		
MATERIAL	Machine roughened paper		
SYSTEM USAGE	<input checked="" type="checkbox"/> Joints	<input checked="" type="checkbox"/> Internal corners	<input checked="" type="checkbox"/> External corners
	<input checked="" type="checkbox"/> Standard	<input checked="" type="checkbox"/> Fire rated	<input checked="" type="checkbox"/> Wet area systems
COLOUR	White		

TECH DATA

Application

- Paper tape must be used in fire rated and wet area systems.
- Knauf recommends use of MastaMate Paper Tape for all applications to create the strongest joint.
- MastaMate Paper Tape is designed to be used by both hand and automatic tool application.
- MastaMate Paper Tape is used in combination with compound to joint plasterboard walls and ceilings.
- All joints must be evenly finished with compounds and lightly sanded to remove tool marks and ridges prior to decoration.
- Level 4 Finish and Level 5 Finish must use the 'Three Coat Jointing System' for all joints and external corners. Internal corners only require a Bedding Coat and a Finish Coat.

Minimum coat width

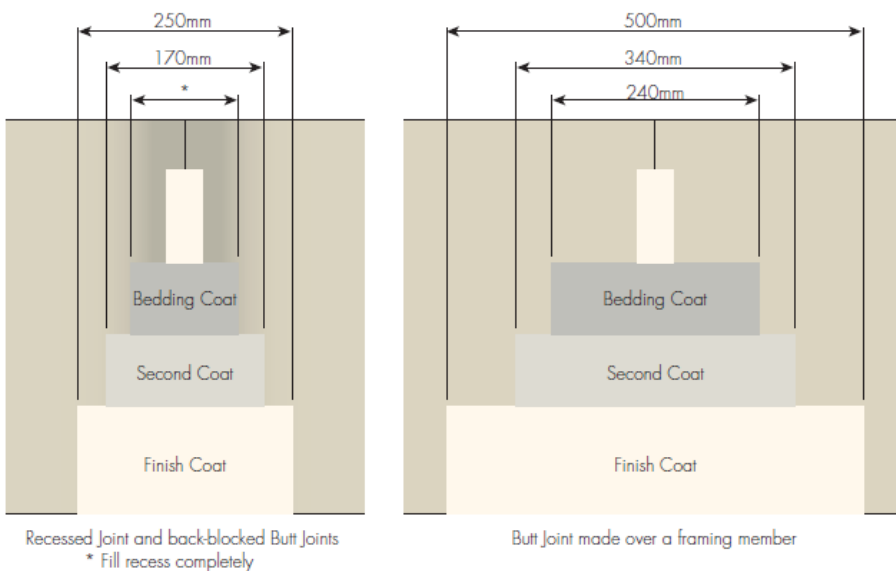

- A 'Three Coat Jointing System' consists of a Bedding Coat, a Second Coat and a Finish Coat of compound.
- Mastalite may be used as an alternative to MastaTape for the second coat. Setting cements like MastaBase and MastaLongset must not be applied over air drying compounds.

Optimise product performance by:

- Storing in closed cartons at normal room temperature in an enclosed dry area.
- Maintaining a minimum 10°C working temperature during application and drying.
- Maintain appropriate ventilation to avoid excess moisture.



Warranty

Knauf's products are guaranteed by a 10 Year Warranty. For details visit knaufplasterboard.com.au knaufplasterboard.co.nz

Technical Advice

AU 1300 724 505
NZ 0800 884 326