


TECH DATA

Benefits

- One 10mm board for wall and ceilings
- Can span 600mm centres on ceilings
- Sag resistant ceiling solution

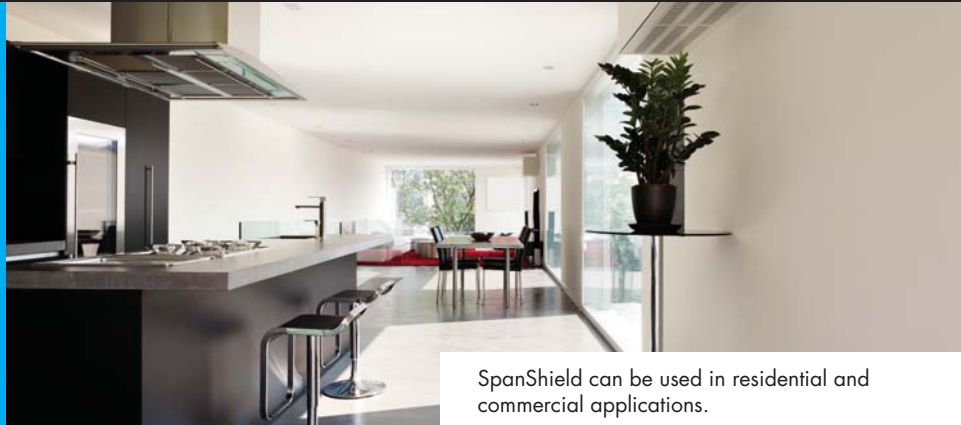

SpanShield can be used in residential and commercial applications.

SpanShield is standard plasterboard made from a core of gypsum sandwiched between two layers of heavy duty recycled paper. The face paper is coloured ivory ready for paint or wall paper finish.

Application

SpanShield is an internal wall and ceiling lining suitable for residential and commercial applications. It is usually installed over a timber or steel

frame and can also be installed over a masonry wall.

Installation

SpanShield is usually installed using the 'Fastener and Stud Adhesive Method'. It may also be installed using the 'Fastener Only Method' or 'Masonry Adhesive Method'.

Refer to the Knauf *Plasterboard Installation Site* guide for complete installation instructions.

Product Information

SHEET SIZE	THICKNESS (mm)	WIDTH (mm)	LENGTH (mm)	WEIGHT* (kg/m ²)
	10	1200	3000, 3600, 4200, 4800, 5400, 6000	7.0
		1350	3000, 3600, 4200, 4800, 6000	
FIRE HAZARD PROPERTIES	Group 1S material according to NZBC Performance Clause 3.4(a)			
VOLATILE ORGANIC COMPOUNDS	Less than 0.5mg/m ³ TVOC			
HAZARDS IDENTIFICATION	Non hazardous			

* Weights indicated are nominal



Quality ISO 9001
SAI GLOBAL



SpanShield is manufactured in accordance with quality systems certified as complying with AS/NZS ISO 9001:2008 and meets the requirements of AS/NZS 2588, *Gypsum Plasterboard*.



SpanShield has been independently certified by Global GreenTag to GreenRate Level A, recognised

by the GBCA for Materials and VOC credits.

Warranty

Knauf's products are guaranteed by a 10 Year Warranty. Visit knaufplasterboard.com.au knaufplasterboard.co.nz

Technical Advice

AU **1300 724 505**

NZ **0800 884 326**